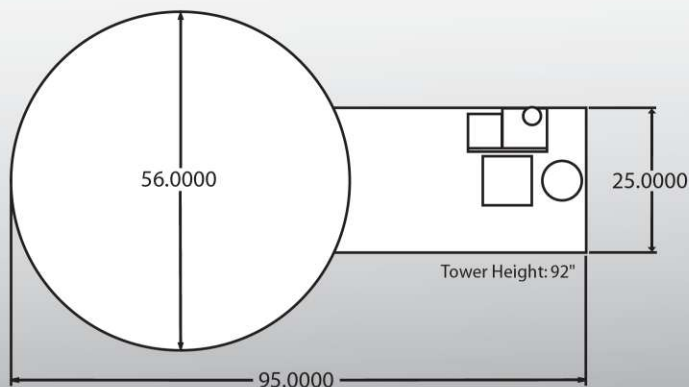


**FOX C1plus**

Control Panel Face

**CONTROL FEATURES**

- ✓ • **Programmable Key Pad Controls**
- ✓ • LCD Display Screen (providing function control viewing)
  - Variable Turntable Speed 0-15 RPM
- ✓ • Variable Film Carriage Speed Up/Down Control
- ✓ • Separate Top/Bottom Wrap Selectors 1-9
- ✓ • Separate Film Height Selector 1-9"
  - Flush Mounted Control Panel (built into tower)
  - Cycle Counter
  - Manual Carriage Raise/Lower Control
  - Turntable Jog with Auto Home Alignment
  - Large Emergency push button power On / Off Switch with indicator light
  - Start Cycle Push Button
  - Standard Wrap Up/Down Program
  - 12 Volt DC Control System (for operator safety)
  - All circuits protected by fuses (easy access)
  - 20 amp Power Board Circuits to carry a 10 amp load

**TECHNICAL INFORMATION**

- All switches, relays, and SCR controls etc. are available locally throughout North America
- Power requirements 115 VAC @ 15Amps, 60Hz
- Complete manual with electrical schematic provided with machine

**TURNTABLE DRIVE**

- ✓ • **Positive home alignment and counter**
- 0-15 RPM turntable speed
- ½ HP SCR variable speed drive
- Adjustable electronic soft start / stop

**FOX C1 PLUS**

- Rigid base frame construction
- 56" Diameter steel turntable plate
- ✓ • **32 table support wheels** requires no lubrication to the face or under the table (250lbs dynamic each wheel)
- Heavy duty #50 chain and sprocket drive system
- 3" from floor to top of turntable
- Suggested Maximum Load Size: 52"L x 52"W (74" Diagonal) x 90" High
- ✓ • **Weight Capacity: 5000 lbs.**
- Powder Coat Finish

**STRUCTURAL FEATURES**

- ✓ • **Heavy Duty 3/8" turntable plate**
- Fork Lift portable from rear
- Formed steel tower
- 5/16" thick base plate
- Three 3/8" thick support rings

**CARRIAGE LIFT**

- Ultra Wear slide supports
- Heavy duty ANSI #50 Chain Carriage Lift
- ½ HP DC SCR variable speed drive
- ✓ • **Carriage chain fully guarded**

**FILM DELIVERY**

- ✓ • **FOX "Linear" 20 inch powered pre-stretch film delivery system**
- Easy thread film carriage
- No hinges, latches or idler rollers to wear and cause inconsistent film stretching
- Electronic film force control on film carriage
- Adjustable mechanical force to load
- Sensor switch film feed speed control
- 1/2 HP DC SCR variable speed film drive
- ✓ • **Pre-stretch 50-300% upon request (200% standard settings)**
- Triple beam auto height eye capable of recognizing all colors including black

**OPTIONS:**

- Loading Ramp
- Extended Heavy Duty Ramp for powered hand truck
- Base and Height extension
- End of Cycle Film Cut Off