


# AUTOMATED HAND WRAP    **MANUAL LIFT CARRIAGE**

## **FOX MLP**



Control Panel Face

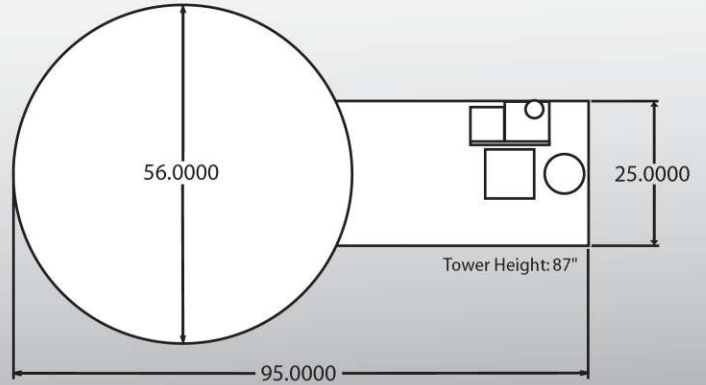

## **CONTROL FEATURES**

- Power On / Off Switch
- Soft DC drive
- All controls fused

## **TECHNICAL INFORMATION**

- All switches, motors, and SCR controls etc. are available throughout North America
- Power requirements 115 VAC @ 15Amps, 60Hz
- Complete Manual electrical schematic with machine

## **TURNTABLE DRIVE**

- ✓ • **0 – 15 RPM turntable speed**
- 1/2 HP SCR variable speed drive
- Adjustable electronic DC soft start / stop

## **STRUCTURAL FEATURES**

- ✓ • **Heavy Duty 3/8" turntable plate**
- Fork Lift portable from rear
- Formed steel tower
- 5/16" thick base plate
- Three 3/8" thick support rings

## **CARRIAGE LIFT**

- Manual film carriage counter balanced for easy lifting
- Heavy duty ANSI #50 chain carriage lift
- ✓ • **Carriage Chain fully guarded**

## **FILM DELIVERY**

- Adjustable friction carriage film dispenser
- Supports 12" to 20" film

## **OPTIONS:**

- Loading Ramp
- Extended Heavy Duty Ramp for powered hand truck

## **FOX MLP**

- Rigid base frame construction
- 56" Diameter steel turntable plate
- ✓ • **32 table support wheels** requires no lubrication to the face or under the table (250 lbs Dynamic each Wheel)
- Heavy duty #50 chain and sprocket drive system 3" from floor to top of turntable

- Suggested Maximum Load Size: 52"L x 52"W (74" Diagonal) x 84" High
- ✓ • **Weight Capacity: 5000 lbs.**
- Powder Coat Finish

**RED SERIES**