

HAND PUMP/BATTERY SKID LIFTS

- Quick lift for loads under 330 lbs.
- Normal lift for loads over 330 lbs.
- Front support legs with adjustable stabilizers that contact the floor when forks are 16.5" above the floor
- Telescopic cylinder gives better safer lines

LIFT HEIGHT

- 32"

LOWERED HEIGHT

- 3.4"

FORK DIMENSIONS

- 21" or 27" wide x 45" long

SAFETY


- Front support legs and adjustable stabilizers contacts floor automatically at 16.5"

POWER SUPPLIES

- Hand Pump
- D/C 12v battery

OPTIONS

- Platforms available

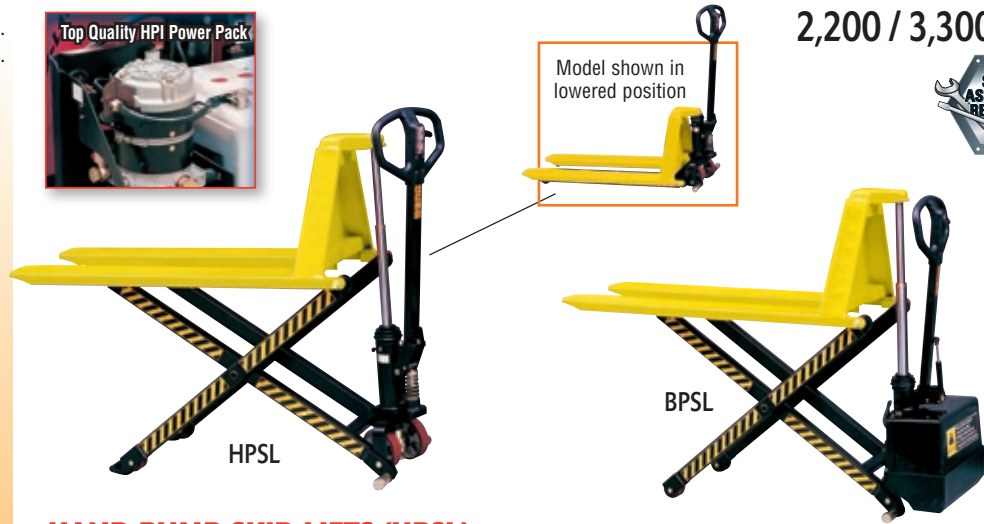

2,200 / 3,300 LBS



HAND PUMP SKID LIFTS (HPSL)

MODEL NO.	CAPACITY (LBS.)	WEIGHT LIFT/STROKE	LIFT HEIGHT (IN.)	MIN. FORK HEIGHT (IN.)	O.A. FORK WIDTH (IN.)	O.A. FORK LENGTH (IN.)	LOAD WHEEL	STEERING WHEEL	WEIGHT (LBS.)
HAND PUMP SKID LIFTS									
HPSL22	2200	up to 330 lbs. - 1"/stroke	32	3.4	21 or 27	45	2.75" DIA.	6"	246
HPSL33	3300	330 lbs.+ - .41"/stroke	32	3.4	21 or 27	45	2.75" DIA.	6"	275

BATTERY SKID LIFTS (BPSL)

MODEL NO.	CAPACITY (LBS.)	BATTERY	LIFT HEIGHT (IN.)	MIN. FORK HEIGHT (IN.)	O.A. FORK WIDTH (IN.)	O.A. FORK LENGTH (IN.)	LOAD WHEEL	STEERING WHEEL	WEIGHT (LBS.)
BATTERY SKID LIFTS									
BPSL22	2200	12V	32	3.4	21 or 27	45	2.75" DIA.	6"	323
BPSL33	3300	12V	32	3.4	21 or 27	45	2.75" DIA.	6"	345