
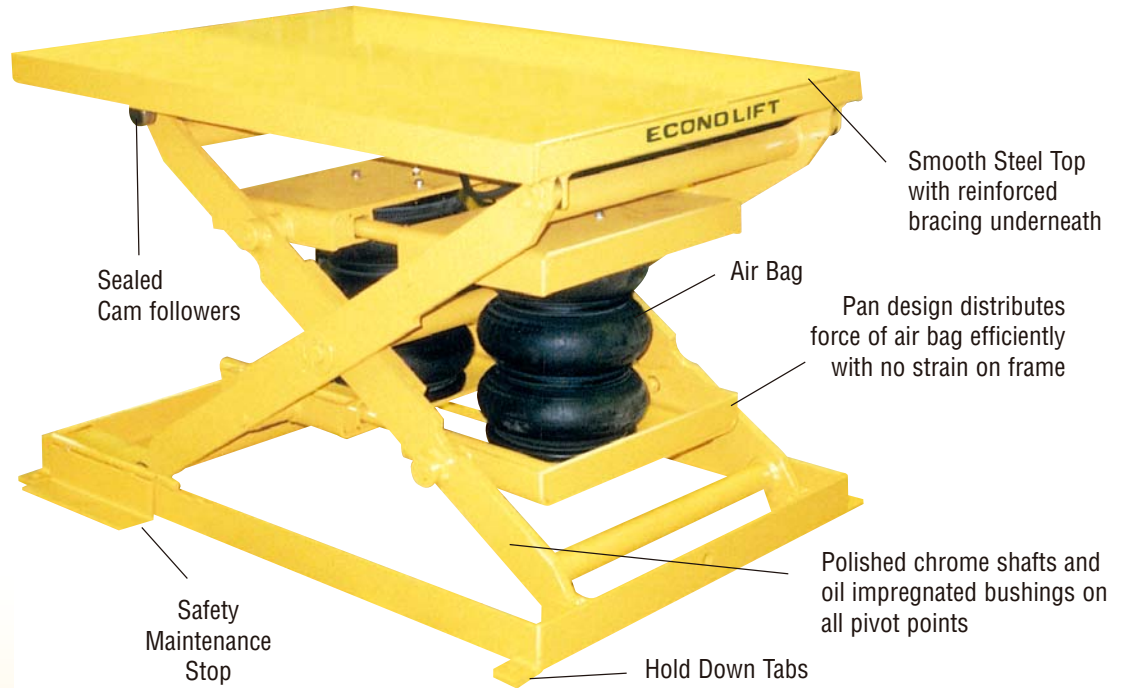


# LIFT TABLE

1,000/2,000/4,000/6,000 LBS

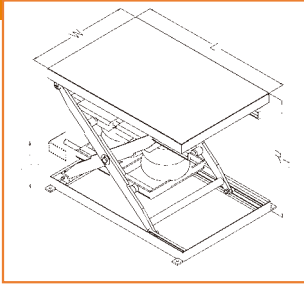

## CAPACITY

- 1,000/2,000/4,000/6,000 lbs.

## PLATFORM SIZES

- 32" wide x 48" long to 72" wide x 72" long

## BASE SIZES

- Standard 32" and 48" wide x 48" long

## TRAVEL

- 24" vertical travel

## LOWERED HEIGHT

- 9"

## SAFETY

- Flip over maintenance stop
- Captured rollers

## POWER SUPPLY

### Air Bag

- Pedestal Mounted Hand Control (up/down valve)
- Covered Foot Control (optional)



## MAINTENANCE

- Hinged table top provides easy access to air bag
- Self lubricated bronze bushings on all wear points

## OPTIONS

- Oversized platforms
- Corner gussets
- Beveled edges for pit mounting
- Eye-bolts for pit mounting
- Rotating tops
  - spring detents
  - manual detents
- Roller conveyor, Ball transfer tops
- Bellow safety skirting
- Semi-portable
- Portable
- Motion stabilizer
- Fork pockets
- Safety lock-out valves
- Ross air valves

## OPTIONS



MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE wide x length (W X D) (IN.)	OVERSIZED PLATFORM (UP TO) (IN.)	LOW HEIGHT (LH) (IN.)	TRAVEL (IN.)	RAISED HT (RH) (IN.)	# AIR BAGS	SHIPPING WT (LBS)
<b>BASE SIZE: 32" WIDE X 48" LONG</b>								
ABSL 10-3248	1,000	32 x 48	56 x 72	9	24	33	1	650
ABSL 20-3248	2,000	32 x 48	56 x 72	9	24	33	1	685
ABSL 40-3248	4,000	32 x 48	56 x 72	9	24	33	2	725
<b>BASE SIZE: 48" WIDE X 48" LONG</b>								
ABSL 10-4848	1,000	48 x 48	72 x 72	9	24	33	1	720
ABSL 20-4848	2,000	48 x 48	72 x 72	9	24	33	1	745
ABSL 40-4848	4,000	48 x 48	72 x 72	9	24	33	2	870
ABSL 60-4848	6,000	48 x 48	72 x 72	9	24	33	4	925